

1064nm 15mW FP SM coaxial laser diode

Version: 3.1 17-03-01

Model: LSFLD1064-15

Features:

- MQW F-P LD
- Single mode
- Built-in monitor PD
- Metal can type hermetic
- Low threshold/operate current
- High reliable

Applications:

- Optical Sensing
- Industrial automatic control
- Science analysis and experiment
- Test and Measurement Equipment



Absolute maximum ratings:

parameter	symbol	value	unit
Operating temperature	Top	-10~+50	°C
Storage temperature	Tstg	-15~+85	°C
Laser diode Reverse voltage	V _r	2	V
Soldering temperature/time		260/10	°C/S

Electrical and optical characteristics:(T=25°C)


parameter	symbol	Min.	Typ.	Max.	unit
Center wavelength	λ	1058	1064	1070	nm
Threshold Current	I _{th}		20	40	mA
Operating Current	I _{op}		100	140	mA
Spectral width	$\Delta\lambda$		3		nm
Operating Voltage	V _{op}		1.8	2.3	V
Light output power(from 9um SM fiber)*1	P _o (CW)		15		mW
Monitor current	I _m	0.2	1	2	mA
package	Hermetic TO18 Can with fiber coupling or receptacle				

*1 Note: for 62.5um MM fiber, the output power can double.

For 6um SM fiber (NA =0.14), the output power can reduce about 50%.



NOTICE: The above product specifications are subject to change without notice.

The package Dimensions

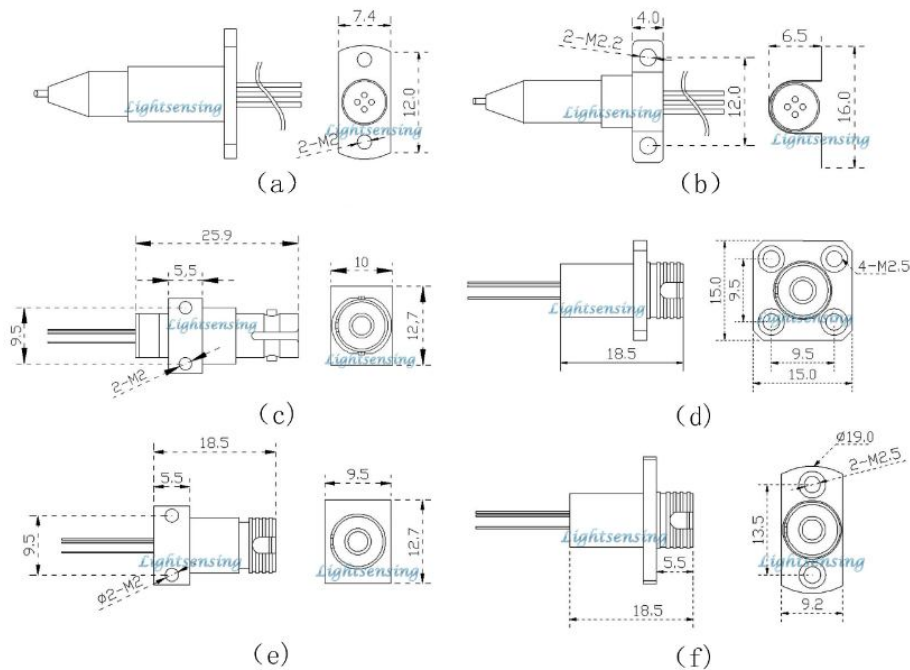

PIN description

Bottom View

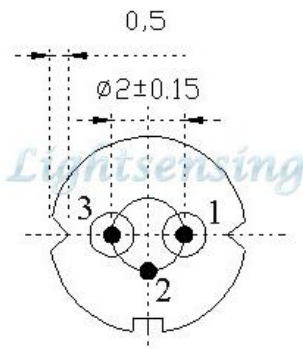

pin	function
1	LD Cathode
2	LD anode, PD cathode, case
3	PD anode

Order information

LSFLD1064-X-X

mW	X=a	a package with 4um SM, 9um SM or MM Fiber coupling with FC/UPC or FC/APC connector
X=15	X=b	b package with 4um SM, 9um SM or MM Fiber coupling with FC/UPC or FC/APC connector
X=other	X=cJKST	c package with ST receptacle
	X=dJKFC	d package with FC receptacle
	X=e JKFC	e package with FC receptacle
	X=f JKFC	f package with FC receptacle
	X=Other	By customer's request

The cautions

- 1: The above product specifications are subject to change without notice.
- 2: The suitable ESD protection is required in storage, transportation and using
- 3: The fiber bending radius no less than 20mm for avoiding fiber damaged ,Be sure the fiber coupling facet is clean before connecting it to opto-circuit.