

2.5Gbps InGaAs APD with pre-amplifier

Version: 3.1 17-03-01

Model: LSIAPDT-2.5G

Features:

- High sensitivity at the wavelength of 1310nm/1550nm
- Data rate up to 2.5Gbps
- Low voltage power supply: 3.3V and Differential output
- Built-in InGaAs APD+TIA
- Hermetic TO-46 Can or with fiber coupling



S1



Fiber coupling

Applications:

- Telecommunication and Data communication
- Optical sensor and OTDR
- high resolution Optical Coherence Tomography
- Industrial automatic control
- Science analysis and experiment

The absolute values


APD Operating voltage	$0.99 \times V_{BR}$	Operating temperature	$-40 \sim +85^{\circ}\text{C}$	Input light power	-5dBm
Amp Operating voltage	4V	storage temperature	$-55 \sim +85^{\circ}\text{C}$	Soldering temperature(time)	260°C (10s)

The opto-eletronic characteristics (@ $T_c=22\pm 3^{\circ}\text{C}$)


Parameters	Sym.	Test conditions	Min	Typ	Max	Unit
Response Spectrum	λ	—	800~1700			nm
APD responsivity	Re	$\lambda=1.55\mu\text{m}, \phi_e=1\mu\text{W}, V_R=V_{BR}-3$		10		A/W
Small signal bandwidth(-3dB)	BW	$V_R=V_{BR}-3$		1.5		GHz
Low frequency cut-off	LF	-3dB		20		KHZ
Sensitivity	S	PRBS= $2^{23}-1$, BER= 10^{-10} , 1310nm ER=10dB@2.5Gbps, $V_R=V_{BR}-3$		-32		dBm
Output impedance	R _{out}	Differential output	80	100	140	Ω
APD reverse breakdown voltage	V _{BR}	I _D =100 μ A	35		55	V
APD operation voltage	V _{APD}	Best sensitivity		V _{BR} -3		V
Saturated optical power	Psat		-7			dBm
Operating voltage of TIA	V _{cc}		3.0	3.3	3.6	V
Operating current of TIA	I _{cc}		15	20	28	mA
Transimpedance	Z _t			8		K Ω
Operating voltage temperature coefficient	δ	T _c = $-40 \sim +80^{\circ}\text{C}$		0.12	0.15	V/ $^{\circ}\text{C}$
package	Hermetic TO-46 Can with pre-amplifier and lens cap or with fiber coupling					

NOTICE: The above product specifications are subject to change without notice.

The typical Responsivity curve

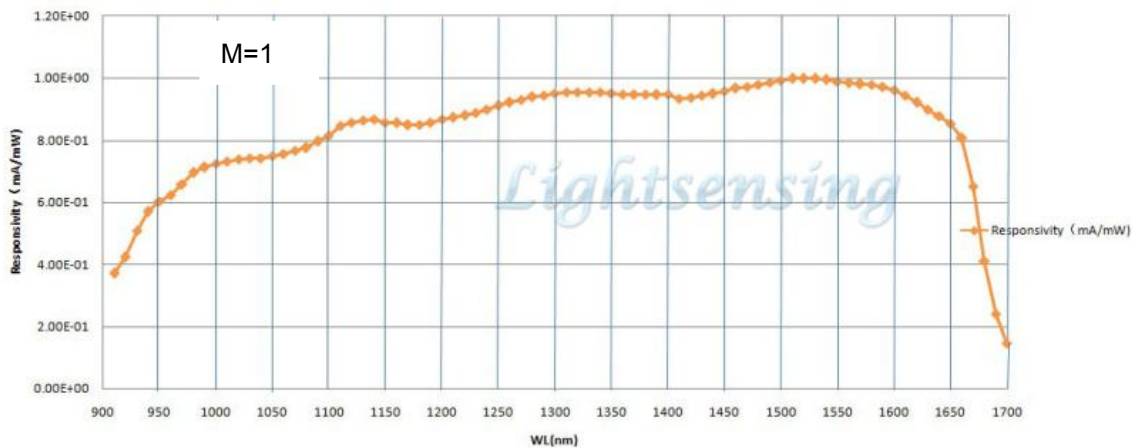

The package and Lead

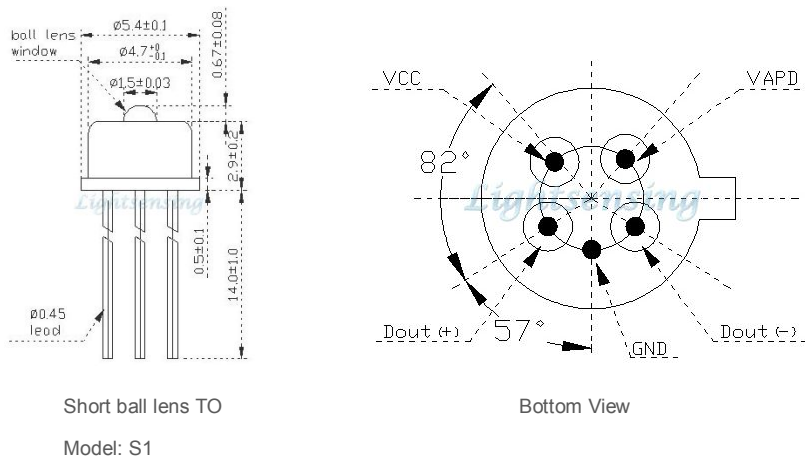

Note: In order to get other dimensions, please contact us.

Ordering Information

LSIAPDT-2.5G-X

X=S1	TO-46 Can with short ball lens cap
X=0	TO-46 Can with flat window cap
X=SMFP	SM Fiber coupling with FC-PC connector
X=SMFA	SM Fiber coupling with FC-APC connector
X=SMSA	SM Fiber coupling with SC-APC connector
X=5MMFA	50um MM Fiber coupling with FC-APC connector
X=6MMFA	62.5um MM Fiber coupling with FC-APC connector
X=Other	By customer's request