




Devices thru Material Innovation

NEC/TOKIN

Vol.08

Multilayer Piezoelectric Actuators

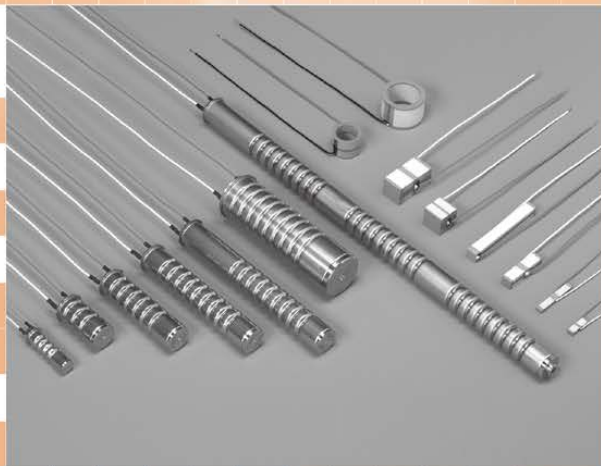

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

**PRECAUTIONS TO BE TAKEN WHEN USING MULTILAYER
PIEZOELECTRIC ACTUATORS**
(Please read these precautions before using our products)

1. Before using our products or designing a system using our products, read the precautions and specifications (such as level of quality) for the products you intend to use on the last page of this manual.

2. The main failures with multilayer piezoelectric actuators are deterioration of insulation resistance, short-circuit, and open-circuit.

Before using the products, design systems carefully to ensure redundancy, prevention of the spread of fire, and prevention of faulty operation allowing for the occurrence of failures.

3. Use the products after checking the working conditions and rated performance of each of the multilayer piezoelectric actuator series.

Selection of AE series (a resin-coated type) or ASB, ASL and AHB series (a metal-sealed type) should be based on the intended working temperature and humidity.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

CONTENTS

Multilayer piezoelectric actuators product line up	5
Resin coated type multilayer piezoelectric acutuators AE series.....	6
Metal sealed type multilayer piezoelectric actuators	12
ASB series (85°C rated), ASL series (150°C rated),	
AHB series (High displacement model)	
Reliability	22
Guide to use	24
Precautions	26



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

NEC TOKIN's multilayer piezoelectric actuators are available in four series.

Resin-coated type General-purpose 85°C rated AE series	Metal case type High-performance General-purpose 85°C rated ASB series 150°C rated ASL series High displacement model AHB series
--	--

*AE series is resin-coated products. Therefore we recommend using metal case type, ASB, ASL and AHB series in high humidity condition.


NEC TOKIN's multilayer piezoelectric actuators are designed using unique element structure technology and using ceramic materials with high electrostrictive factors developed by NEC TOKIN.

*For detail information of piezoelectric ceramic material, please refer to a catalogue of "Piezoelectric ceramics".

Features

- ☐ Special ceramics developed by NEC TOKIN are used in piezoelectric ceramic elements.
- ☐ As compared with conventional actuator elements, NEC TOKIN's multilayer piezoelectric actuators have advantages as follows.

- Advantages over electromagnetic actuators
 - Faster response
 - High resolution for positioning
 - Large generated force
 - Low power consumption
 - No electromagnetic noise
- Advantages over bimorph piezoelectric actuators
 - High energy conversion efficiency (around 7 times the energy conversion efficiency of the bimorph type actuator), and low power consumption
 - Large generated force
 - Stable displacement, and reduced shift and creep phenomena
 - Response speed (more than 100 times the response speed of the bimorph piezoelectric actuator)
- Advantages over stacked piezoelectric actuators
 - Compact size (less than 1/10 the specific volume of the stacked piezoelectric actuator)
 - Low drive voltage, and ease of use
 - Inexpensive

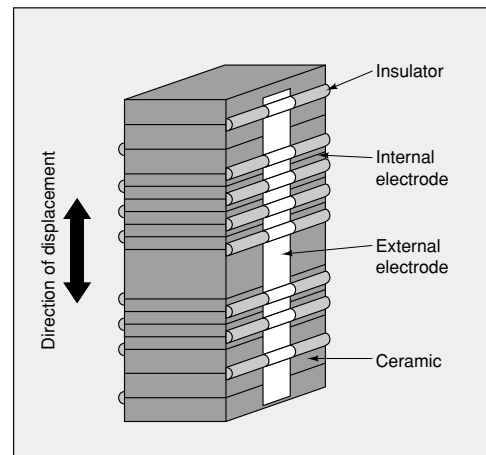


Structure of NEC TOKIN's Multilayer Piezoelectric Actuator




Multilayer piezoelectric actuators product line up

Resin-coated type

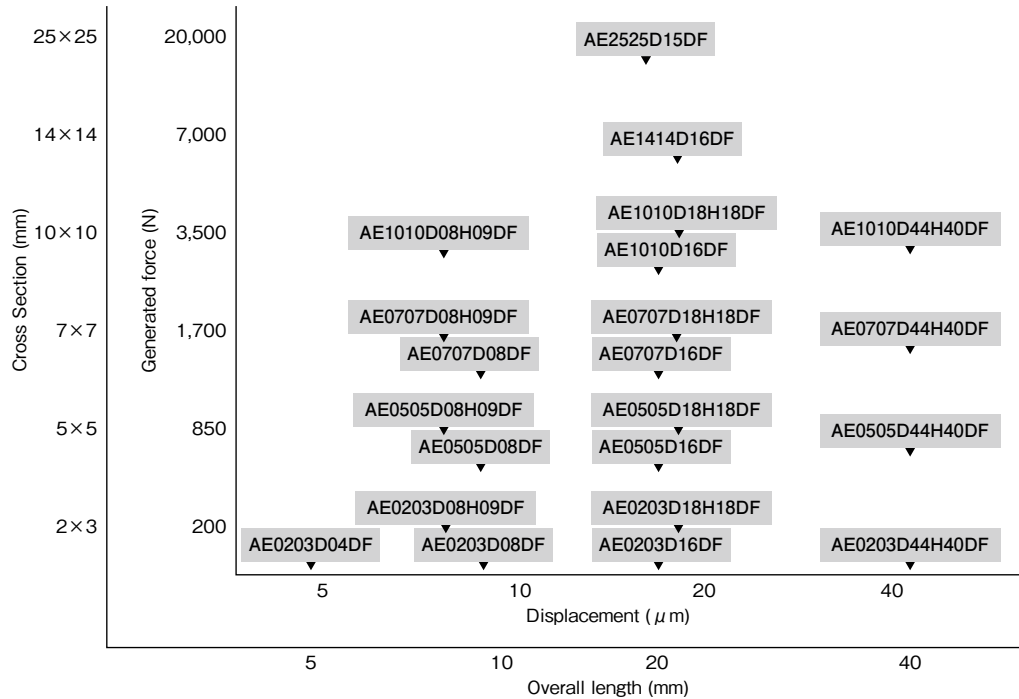

Metal sealed type

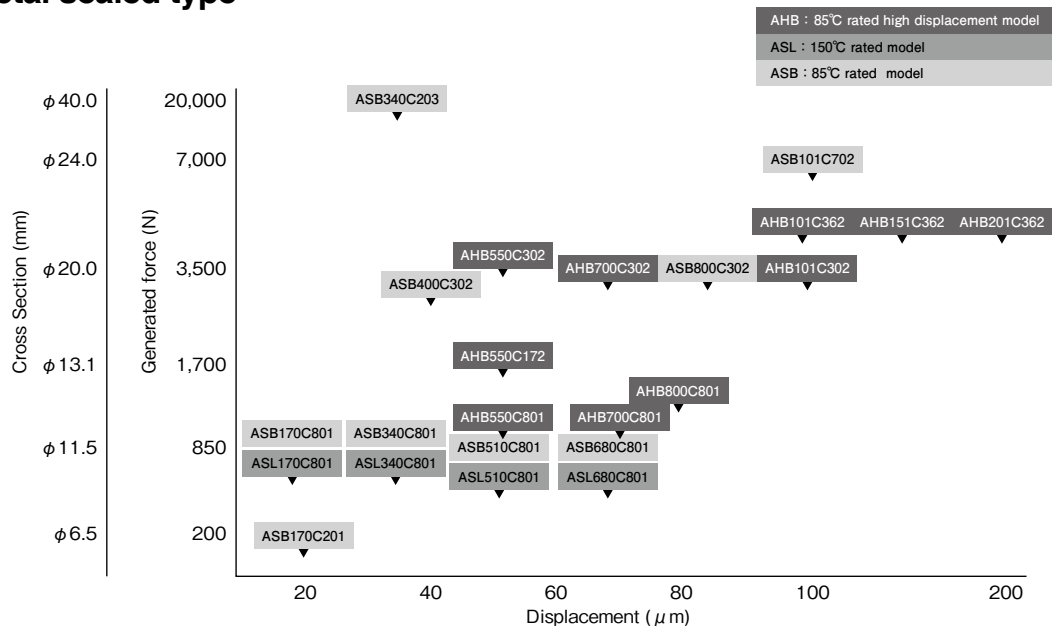

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Resin coated type multilayer piezoelectric actuators

AE Series



Features

- Large generated force: 3,500 N/cm² (typ.)
- High-speed response: Driving up to about 1/3 of self-resonant frequency (in several ten kHz) is possible.
- Accurate positioning: Controllable in nm order.
- Low power consumption: Can be retained at the leakage current state (100 μA or less).
- Very small size: 1/10 or smaller than conventional multilayer actuators (specific volume)

Outline

Multilayer piezoelectric actuators are ceramic elements for converting electrical energy into mechanical energy such as displacement or force by utilizing the piezoelectric longitudinal effect.

NEC TOKIN's multilayer piezoelectric actuators are produced based on our unique element structure design and using originally developed piezoelectric ceramic materials with high electrostrictive factors. Compared to conventional piezoelectric actuators, they are smaller in size but can generate higher displacement and force at low voltages.


Especially, the resin-coated AE series actuators feature compact size and wide variety in shape for applications such as ultra-fine positioning mechanisms and drive sources.

Applications

Positioning, Auto focusing of optical system, Pumps, Valves, Vibration source, Vibration controls, Sensors, Image stabilization of DSC, Mirror / Prism positioning, Manipulators, Motors, Printer, etc.

Numbering system

Example: **AE 0505 D16 XXX F**

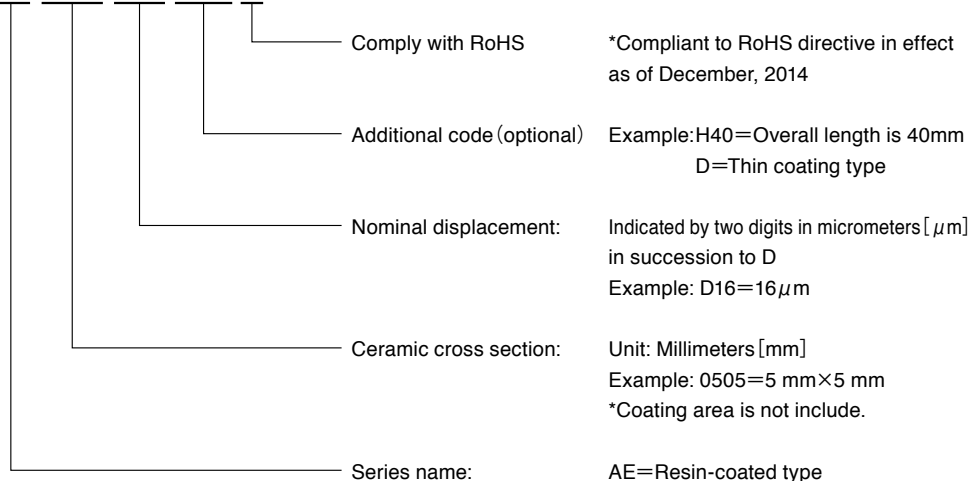

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Standard Parts List

Cross Section [mm]	Overall length [mm]	Model	Displacement [μm]	Generated force [N]	Stiffness (N/μm)	Resonance frequency [kHz]	Capacitance [μF]	Insulation resistance [MΩ]
			Maximum driving voltage [150VDC]					
2 × 3	5	AE0203D04DF	4.6 ± 1.5	200	43.5	261	0.09	100
	9	AE0203D08H09DF	8.0 ± 2.0		25.0	152	0.16	100
	10	AE0203D08DF	9.1 ± 1.5		22.0	138	0.18	100
	18	AE0203D18H18DF	19.0 ± 2.0		11.1	76	0.4	50
	20	AE0203D16DF	17.4 ± 2.0		11.5	69	0.35	50
	40	AE0203D44H40DF	42.0 ± 6.6		4.8	34	0.82	20
5 × 5	9	AE0505D08H09DF	8.7 ± 1.5	850	106.3	152	0.68	50
	10	AE0505D08DF	9.1 ± 1.5		93.4	138	0.75	50
	18	AE0505D18H18DF	19.0 ± 2.0		47.2	76	1.6	10
	20	AE0505D16DF	17.4 ± 2.0		48.9	69	1.4	10
	40	AE0505D44H40DF	42.0 ± 6.6		20.2	34	3.4	5
7 × 7	9	AE0707D08H09DF	8.7 ± 1.5	1,700	212.5	152	1.4	10
	10	AE0707D08DF	9.1 ± 1.5		186.8	138	1.5	10
	18	AE0707D18H18DF	19.0 ± 2.0		94.4	76	3.4	5
	20	AE0707D16DF	17.4 ± 2.0		97.7	69	3.4	5
	40	AE0707D44H40DF	42.0 ± 6.6		40.5	34	6.7	5
10 × 10	9	AE1010D08H09DF	9.0 ± 2.0	3,500	437.5	152	2.9	10
	18	AE1010D18H18DF	20.0 ± 3.5		194.4	76	6.6	5
	20	AE1010D16DF	18.4 ± 3.5		190.2	69	5.4	5
	40	AE1010D44H40DF	42.0 ± 6.6		83.3	34	13.6	2
14 × 14	20	AE1414D16DF	18.4 ± 3.5	7,000	380.4	69	10.8	2
25 × 25	20	AE2525D15DF	15.6 ± 2.0	20,000	1282.0	69	30.5	0.4

*Please contact us for the old specifications.

*For detail information of measurement conditions and outer dimension, please refer to "Performance" and "Outer Dimension" sections.

Performance


Item	Standard	Conditions
Operating temperature range	− 25 to + 85°C	When applied with a DC voltage: Ambient temperature When driven by an AC voltage: Ambient temperature + Temperature rise due to generated heat
Recommended Storage condition	− 5 to + 40°C / less than 40%R.H	Recommend storage at room temperature. No condensation.
Maximum driving voltage	150VDC	
Displacement	See the standard parts list	At 150VDC
Generated force (compression resistance)	See the standard parts list	The force required for restricting the displacement to 0 when the maximum driving voltage is applied.
Capacitance	See the standard parts list	f = 1kHz, V=1Vrms (<10 μF) f = 120Hz, V=1Vrms (>10 μF)
Capacitance allowance	+ / − 20 %	
Dissipation factor	5% or less	
Insulation resistance	See the standard parts list	Value obtained in 1 minute at 150 VDC
Resonance frequency	See the standard parts list	With both ends of element in free state Typical value of the element under our test conditions
Tensile strength	1/10 of generated force	Typical value of the element under our test conditions
Young's modulus	4.4 × 10 ¹⁰ N/m ²	Typical value of the element under our test conditions
Temperature cycle test	Displacement: Initial value ± 20% Capacitance: Initial value ± 30% tan δ : Less than initial rated value Insulation resistance: 1MΩ or more Appearance: No noticeable defect	Room temperature (3 min) −25°C (30 min.) Room temperature (3 min) +85°C (30 min) Repetition of 10 cycles of the above




- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Outer Dimensions

Overall length 10,20mm Products



Overall length 5,9,18 and 40mm Products

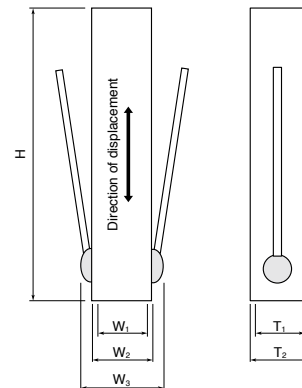

Note:

Factory-shipped polarization : Red lead wire = (+) ,
White lead wire = (-)

Above drawings do not include dimension of wire connection area and diameter of the wire. Please contact us for details.

Unit : mm


Model	H	T1	W1	T2	W2	W3	L
AE0203D04DF	5 ± 0.1	2 ± 0.1	3 ± 0.1	2.4Max	3.4Max	5.5Max	100
AE0203D08H09DF	9 ± 0.1						
AE0203D08DF	10 ± 0.1						
AE0203D18H18DF	18 ± 0.1						
AE0203D16DF	20 ± 0.1						
AE0203D44H40DF	40 ± 0.1	5 ± 0.1	5 ± 0.1	5.4Max	5.4Max	7.5Max	
AE0505D08H09DF	9 ± 0.1						
AE0505D08DF	10 ± 0.1						
AE0505D18H18DF	18 ± 0.1						
AE0505D16DF	20 ± 0.1						
AE0505D44H40DF	40 ± 0.1	7 ± 0.1	7 ± 0.1	7.4Max	7.4Max	9.5Max	
AE0707D08H09DF	9 ± 0.1						
AE0707D08DF	10 ± 0.1						
AE0707D18H18DF	18 ± 0.1						
AE0707D16DF	20 ± 0.1						
AE0707D44H40DF	40 ± 0.1	10 ± 0.1	10 ± 0.1	10.4Max	10.4Max	12.5Max	
AE1010D08H09DF	9 ± 0.1						
AE1010D18H18DF	18 ± 0.1						
AE1010D16DF	20 ± 0.1						
AE1010D44H40DF	40 ± 0.1						
AE1414D16DF	20 ± 0.1	14.2 ± 0.1	14.2 ± 0.1	14.6Max	14.6Max	16.7Max	
AE2525D15DF	20 ± 0.1	25.1 ± 0.1	25.1 ± 0.1	25.5Max	25.5Max	27.6Max	

*L = Length of lead wire



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Wire diameter

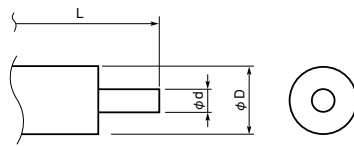

φd =Diameter of lead wire

φD =Outer diameter including the thickness of coating

L =Length of lead wire

Lead wire: Copper wire with Tin plating

Coating: PTFE (Polytetrafluoroethylene)

Unit : mm

Model Number	AWG	φ d	φ D	L	UL number
AE0203D04DF	30	0.3	0.5	100	1993
AE0203D08H09DF					
AE0203D08DF					
AE0203D18H18DF					
AE0203D16DF					
AE0203D44H40DF					
AE0505D08H09DF					
AE0505D08DF	26	0.5	0.8		
AE0505D18H18DF					
AE0505D16DF					
AE0505D44H40DF	30	0.3	0.5		
AE0707D08H09DF					
AE0707D08DF					
AE0707D18H18DF	26	0.5	0.8		
AE0707D16DF					
AE0707D44H40DF					
AE1010D08H09DF	30	0.3	0.5		
AE1010D18H18DF	26	0.5	0.8		
AE1010D16DF					
AE1010D44H40DF					
AE1414D16DF					
AE2525D15DF					

Special Design Parts

Non-standard parts are available per order basis. Please use the guideline below as reference regarding generated displacement and generated force.

Displacement: Roughly proportional to the element length


Generated force: Roughly proportional to the sectional area of the element

Shape: Product cross-section: 1mm × 1mm square or larger

Product length: 1mm or longer

Can be provided in cylindrical ring or other shapes.

Please contact us for further details.

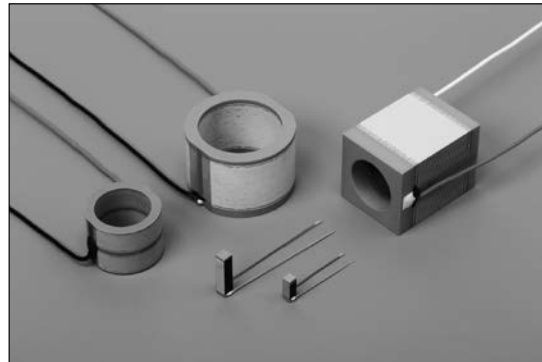

Example of special design parts

	AL1.65 × 1.65 × 5DF	AE1.65 × 1.65 × 5DF	Condition
Ceramic Dimension	1.65 × 1.65 × 5mm	1.65 × 1.65 × 5mm	
Maximum Operating Voltage (V)	± 10V	150VDC	
Displacement	(300nm _{p-p})	(4 μm)	At maximum operating voltage
Capacitance (nF)	90	43	f=1 kHz, V=1Vrms
Operating Temperature	- 25 ~ +85°C		



Small size piezo actuator



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Characteristic Data

Fig-1 Voltage vs. Displacement

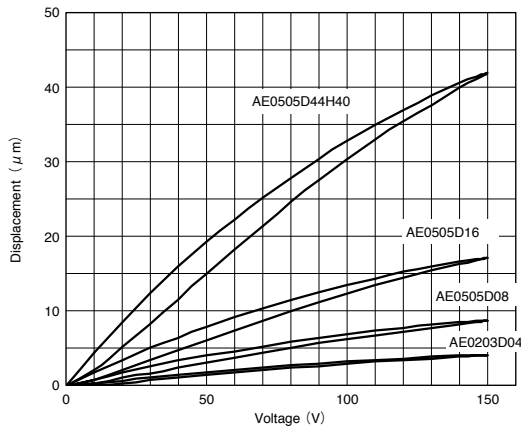


Fig-2 Generated force vs. Displacement of AE0505D16F in Driving voltage

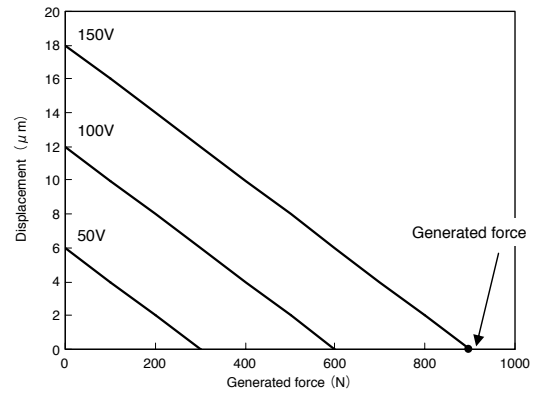


Fig-3 Generated force vs. Displacement-1

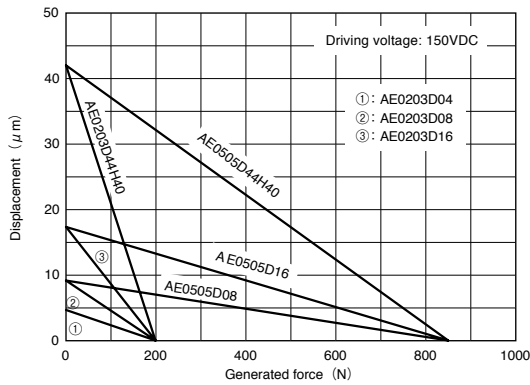


Fig-4 Generated force vs. Displacement-2


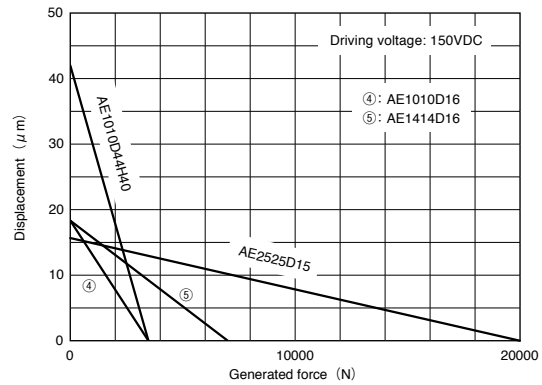


Fig-5 Temperature vs. Displacement

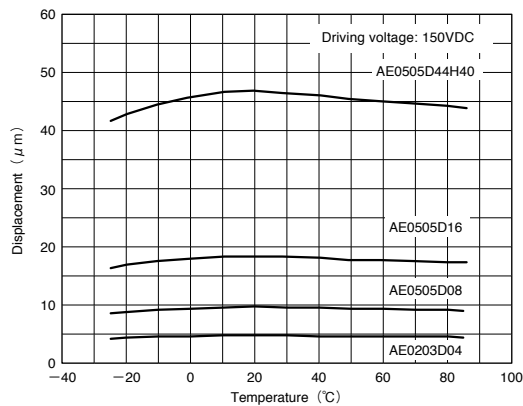

* Listed data are reference values. For the voltage vs. displacement characteristic, the same length of piezo series shows the same voltage vs. displacement characteristic.

* Definition of generated force for Fig-2, Fig-3 and Fig-4;

Force is the force required for restricting the displacement to 0 when the maximum driving voltage is applied.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Fig-6 Temperature vs. Displacement

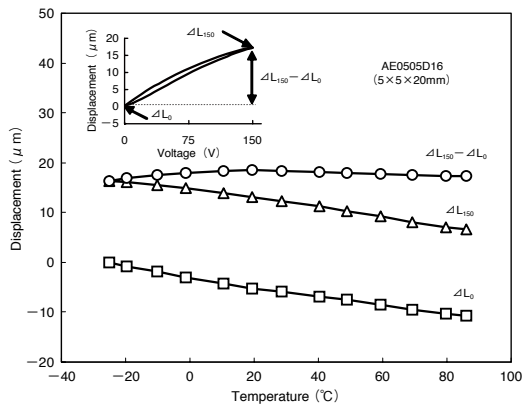


Fig-7 Voltage vs. Displacement in time

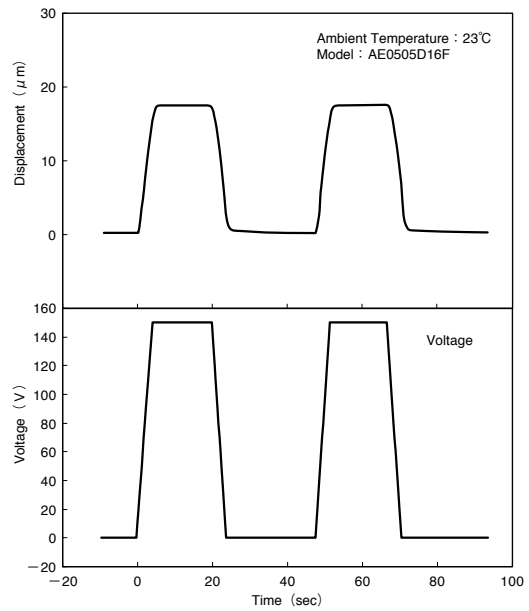


Fig-8 Heat generation vs. Drive frequency-1


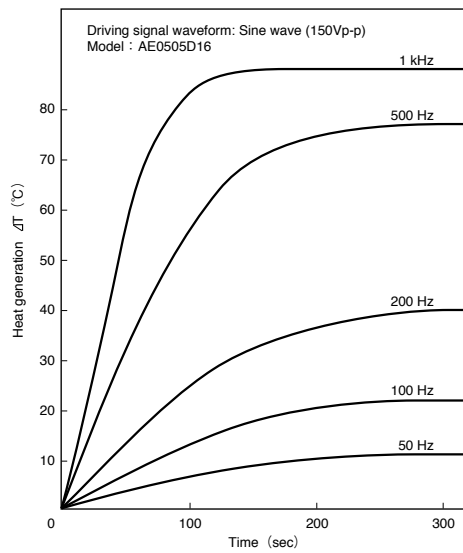



Fig-9 Heat generation vs. Drive frequency-2

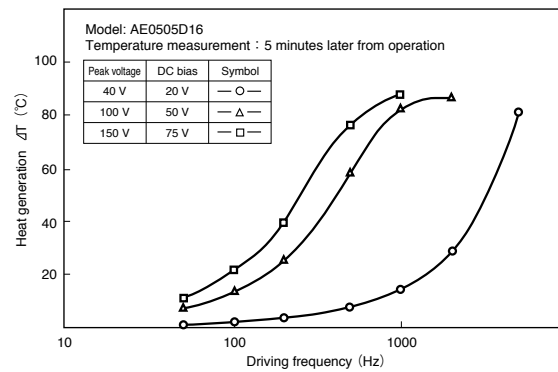

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Metal sealed type multilayer piezoelectric actuators

ASB Series (85°C rated), ASL series (150°C rated), AHB series (High displacement model)

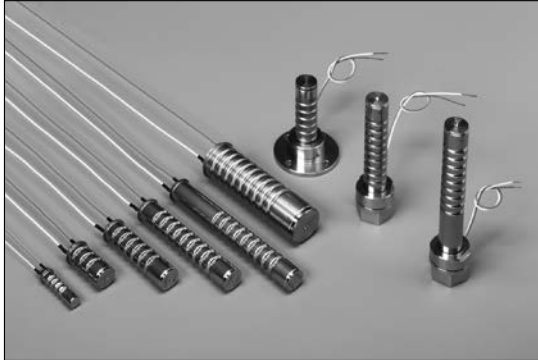

Features

- High reliability: Realization of MTTF = 36,000 hours (at 85°C and 100 V)
- Easier installation into equipments thanks to the built-in pre-load mechanism and mounting attachment
- Minimum mechanical abrasion
- Large generated force: 800 N
- Accurate positioning: Controllable in nm order

Numbering system

Example: **AS B 170 C 801 N P 0 -** LF**

Comply with RoHS	As of December, 2014
Additional code (optional)	Example:-A0 = leads are attached straight
New design No.	Sequentially numbered starting from 0
Configuration of drive block	P=Plane, D=V groove
Configuration of mount	N=Female thread type F=Flange type (refer to page 12 for details) W=Without a flange
Generated force	Unit: Newton [N] The first two digits are effective numerals. The last digit is an exponent of 10. Example: 801=800 N=80 kgf
Maximum drive voltage	C=150VDC
Nominal displacement	Displacement at the maximum voltage Unit: Micrometers (μm) The first two digits are effective numerals. The last digit is an exponent of 10. Example: 170=17 μm
Construction of housing and operating temperature range	B=Bellows (pre-load) , maximum operating temperature: 85°C L=Bellows (pre-load) , maximum operating temperature: 150°C
Series name	AS=Encapsulated in metal case AH=Encapsulated in metal case (High displacement model)

Outline

Multilayer piezoelectric actuators convert electrical energy into mechanical energy such as displacement or force by making use of the piezoelectric longitudinal effect. NEC TOKIN's multilayer piezoelectric actuators are produced based on our unique element structure design by making use of originally developed piezoelectric ceramic materials with high electrostrictive factors. Compared to conventional piezoelectric actuators, they are smaller in size but can generate higher displacements and forces at low voltages. Especially, the metal sealed ASB/ASL and AHB series actuators are much less influenced by ambient humidity because of insulation from the atmosphere. As a result, long service life and high performance never experienced in the past have been attained to allow use in various applications such as semiconductor device production equipment and optical communication equipment which require high reliability.

Applications

Fine adjustment of various X-Y tables steppers, Mirror/prism positioning, Linear motors, Fluid flow control valve drive, Vibration source, Manipulators, etc.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Standard Parts List

• AHB series

Model ※ 1	Displacement [μm]	Generated force [N]	Resonance frequency [kHz]		Capacitance [μF]	Insulation resistance [MΩ]
	Maximum driving voltage [150VDC]		Female thread type Flange type	Without a flange		
AHB550C801 ■●▲ LF	55.0 ± 8	800	12	18	6.4	10
AHB700C801 ■●▲ LF	70.0 ± 15	800	8	10	8.2	5
AHB800C801 ■●▲ LF	80.0 ± 15	800	8	10	9.3	5
AHB101C801 ■●▲ LF	103.0 ± 15	800	8	9	11	5
AHB550C172 ■●▲ LF	52.0 ± 8	1,700	※ 2	20	12	2
AHB550C302 ■●▲ LF	52.0 ± 8	3,000	※ 2	18	26	2
AHB700C302 ■●▲ LF	68.0 ± 15	3,000	※ 2	12	32	2
AHB101C302 ■●▲ LF	95.0 ± 15	3,000	※ 2	9	44	1
AHB101C362 ■●▲ LF	95.0 ± 15	3,600	※ 2	9	54	1
AHB151C362 ■●▲ LF	140.0 ± 18	3,600	※ 2	7	85	0.5
AHB201C362 ■●▲ LF	240.0 ± 24	3,600	※ 2	4	140	0.2

※ 1 : ■ in model number has "N" or "F", "W" letter.

● in model number has "P" or "D" letter.

▲ in model number has New design No.

Example: AHB800C801NP0LF

For detail information of measurement conditions and outer dimension, please refer to "Performance" and "Outer Dimension" sections.

※ 2 : Possibility for custom

• ASB series

Model ※ 1	Displacement [μm]	Generated force [N]	Resonance frequency [kHz]		Capacitance [μF]	Insulation resistance [MΩ]
	Maximum driving voltage [150VDC]		Female thread type Flange type	Without a flange		
ASB170C201 ■●▲ LF	20.0 ± 3	200	24	37	0.5	100
ASB170C801 ■●▲ LF	17.0 ± 3	800	14	32	1.5	30
ASB340C801 ■●▲ LF	34.0 ± 6	800	12	18	3.0	15
ASB510C801 ■●▲ LF	51.0 ± 9	800	10	12	4.5	10
ASB680C801 ■●▲ LF	68.0 ± 12	800	8	9	6.0	5
ASB400C302 ■●▲ LF	44.0 ± 6	3000	※ 2	18	18.0	1
ASB800C302 ■●▲ LF	84.0 ± 15	3000	※ 2	8	34.0	1

※ 1 : ■ in model number has "N" or "F", "W" letter.

● in model number has "P" or "D" letter.

▲ in model number has New design No.

Example: ASB170C801NP0LF, ASB510C801WD1-A0LF

For detail information of measurement conditions and outer dimension, please refer to "Performance" and "Outer Dimension" sections.

※ 2 : Possibility for custom

• ASL series

Model	Displacement [μm]	Generated force [N]	Resonance frequency [kHz]		Capacitance [μF]	Insulation resistance [MΩ]
	Maximum driving voltage [150VDC]		Female thread type Flange type	Without a flange		
ASL170C801 ■●▲ LF	19.0 ± 3	800	14	32	1.3	30
ASL340C801 ■●▲ LF	39.0 ± 6	800	12	18	2.6	15
ASL510C801 ■●▲ LF	58.0 ± 9	800	10	12	3.9	10
ASL680C801 ■●▲ LF	77.0 ± 12	800	8	9	5.1	5

※ 1 : ■ in model number has "N" or "F", "W" letter.

● in model number has "P" or "D" letter.


▲ in model number has New design No.

Example: ASL170C801FP0LF

For detail information of measurement conditions and outer dimension, please refer to "Performance" and "Outer Dimension" sections.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

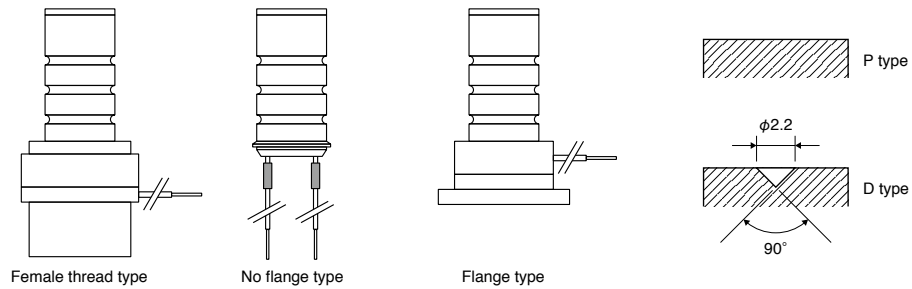

Product appearance example



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Performance


Item	Standard	Conditions
Operating temperature range	ASB/AHB : - 25 to + 85°C ASL : - 40 to + 150°C	When applied with DC voltage: Ambient temperature When driven by pulse: Ambient temperature + Temperature rise due to generated heat
Recommended Storage condition	- 5 to + 40°C	
Maximum driving voltage	150VDC	
Displacement	See the standard parts list	At 150VDC
Generated force (compression resistance)	See the standard parts list	The force required for restricting the displacement to 0 when the maximum driving voltage is applied.
Capacitance	See the standard parts list	f = 1kHz, V=1Vrms (<10 μF) f = 120Hz, V=1Vrms (>10 μF)
Capacitance tolerance	+ / - 20%	
Dissipation factor	5% or less	
Insulation resistance	See the standard parts list	Value obtained in 1 minute at 150 VDC
Resonance frequency	See the standard parts list	With both ends of element in free state Typical value of the element under our test conditions
Airtightness	1×10^{-8} atm cc/sec or less	
Temperature cycle test	Displacement: Initial value $\pm$ 30% Capacitance: Initial value $\pm$ 30% tan δ : Less than initial rated value Insulation resistance: 1 M Ω or more Appearance: No noticeable defect	ASB, AHB ASL Room temperature (3 min) Room temperature (3 min) - 25°C (30 min) - 40°C (30 min) Room temperature (3 min) Room temperature (3 min) + 85°C (30 min) + 150°C (30 min) Repetition of 10 cycles of the above
High-temperature shelf test	Displacement: Initial value $\pm$ 30% Capacitance: Initial value $\pm$ 30% tan δ : Less than initial rated value Insulation resistance: 1 M Ω or more Appearance: No noticeable defect	Temperature ASB, AHB: 85 $\pm$ 2°C ASL: 150 $\pm$ 2°C Time 1,000 $\pm$ 48 h
Solvent resistance test	Displacement: Initial value $\pm$ 30% Capacitance: Initial value $\pm$ 30% tan δ : Less than initial rated value Insulation resistance: 1 M Ω or more Appearance: No noticeable defect Mark: Easily legible	Solvent: Isopropyl alcohol Temperature: 23 $\pm$ 5°C Time: Immersion for 1 min
Heat resistance test	Displacement: Initial value $\pm$ 30% Capacitance: Initial value $\pm$ 30% tan δ : Less than initial rated value Insulation resistance: 1 M Ω or more Appearance: No noticeable defect Mark: Easily legible	Temperature: 150 $\pm$ 3°C Time: 96 $\pm$ 4 h



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Dimensions (Common to ASB, ASL and AHB Series)

● Female thread type

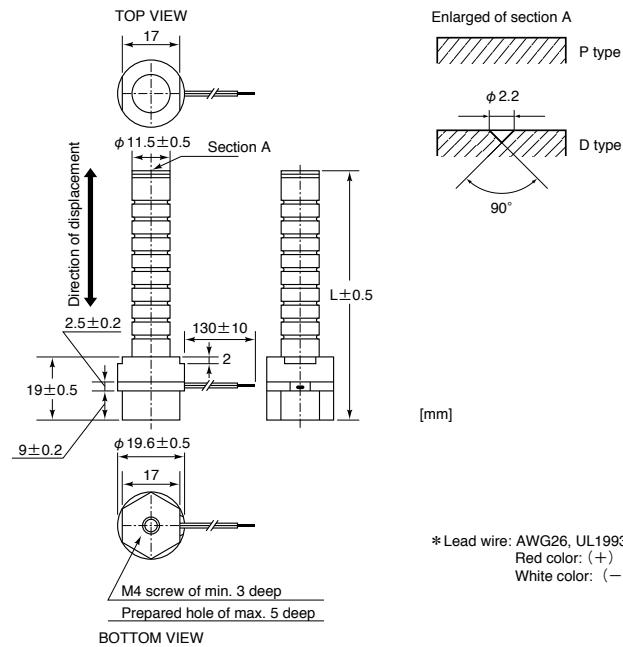


* Lead wire: AWG26, UL1993
Red color: (+)
White color: (-)

Model	L (mm)
ASB170C801NP0LF	38.4
ASL170C801NP0LF	
ASB340C801NP0LF	58.4
ASL340C801NP0LF	
ASB510C801NP0LF	78.4
ASL510C801NP0LF	
ASB680C801NP0LF	98.4
ASL680C801NP0LF	

Model	L (mm)
AHB550C801NP0LF	58.4
AHB700C801NP0LF	78.4
AHB800C801NP0LF	78.4

* Both P type and D type have the same overall lengths

● Flange type

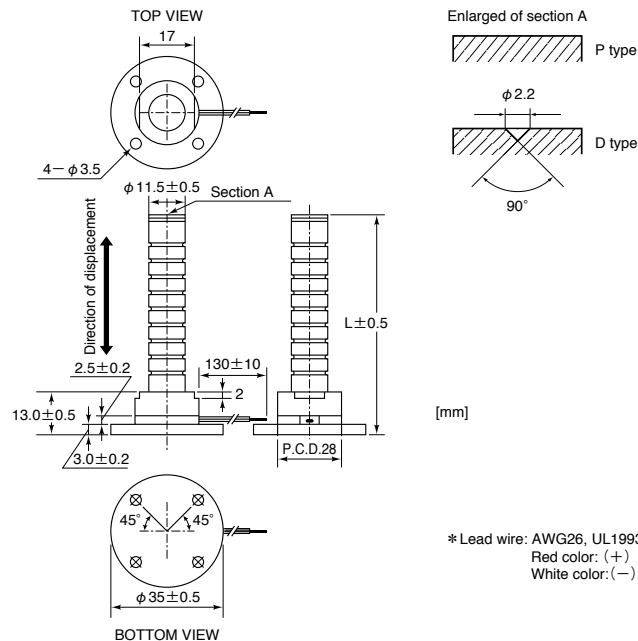

* Lead wire: AWG26, UL1993
Red color: (+)
White color: (-)

Model	L (mm)
ASB170C801FP0LF	32.4
ASL170C801FP0LF	
ASB340C801FP0LF	52.4
ASL340C801FP0LF	
ASB510C801FP0LF	72.4
ASL510C801FP0LF	
ASB680C801FP0LF	92.4
ASL680C801FP0LF	


Model	L (mm)
AHB550C801FP0LF	52.4
AHB700C801FP0LF	72.4
AHB800C801FP0LF	72.4

* Both P type and D type have the same overall lengths



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

● Without flange type

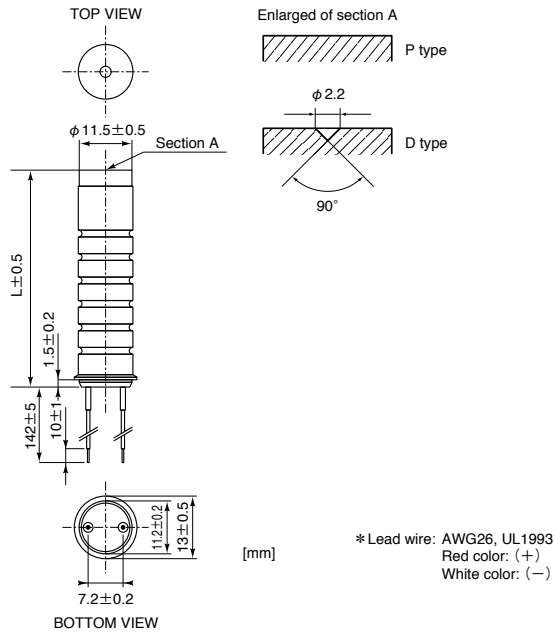


Model	L (mm)
ASB170C801W●1-A0LF	24.4
ASL170C801W●1-A0LF	
ASB340C801W●1-A0LF	44.4
ASL340C801W●1-A0LF	
ASB510C801W●1-A0LF	64.4
ASL510C801W●1-A0LF	
ASB680C801W●1-A0LF	84.4
ASL680C801W●1-A0LF	


Model	L (mm)
AHB550C801W●1-A0LF	44.4
AHB700C801W●1-A0LF	64.4
AHB800C801W●1-A0LF	64.4
AHB101C801W●1-A0LF	84.4

* Note: ● in model number has "P" or "D" letter.

● ASB170C201WP1-A0LF

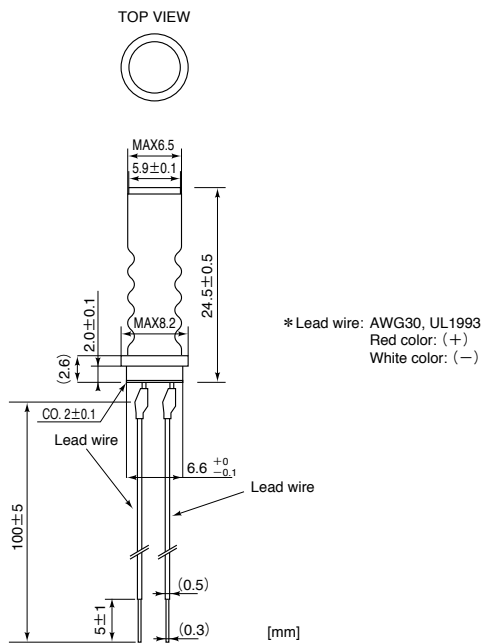


● AHB550C172WD1-A0LF

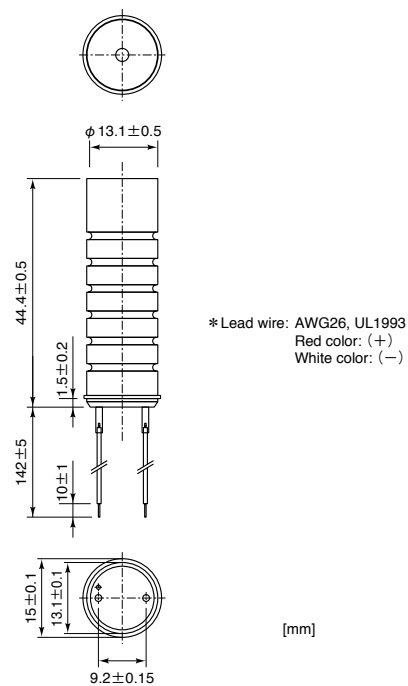

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

● ASB***C302WD1-A0LF
AHB***C302WD1-A0LF,AHB***C362WD1-A0LF

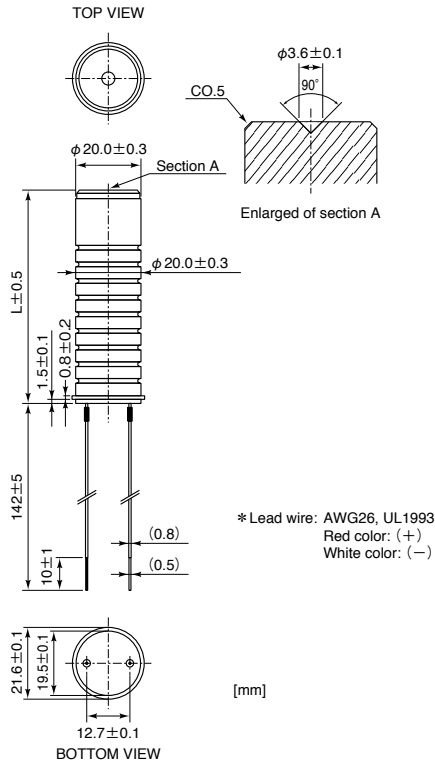


Model	L (mm)
ASB400C302W●1-A0LF	45.4
ASB800C302W●1-A0LF	85.0
AHB550C302W●1-A0LF	45.4
AHB700C302W●1-A0LF	64.4
AHB101C302W●1-A0LF	85.6
AHB101C362W●1-A0LF	85.6
AHB151C362W●1-A0LF	125.4
AHB201C362W●1-A0LF	217.7

* Note: ● in model number has "P" or "D" letter.









- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Example of fixing method for without flange type

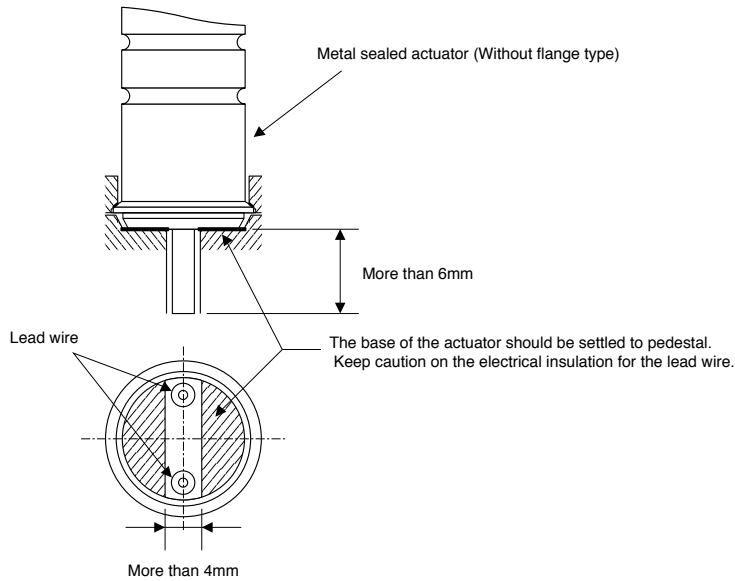



Characteristic Data

• ASB series

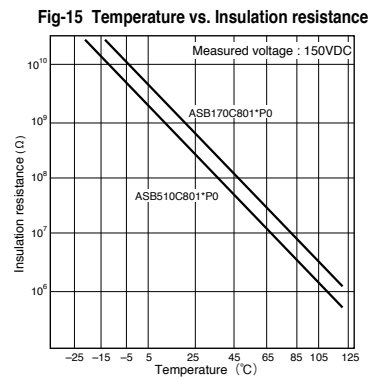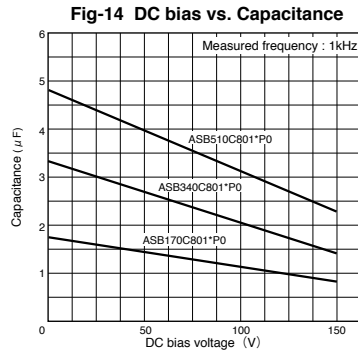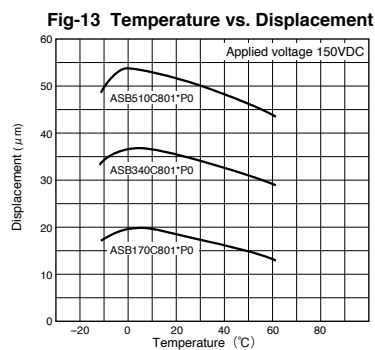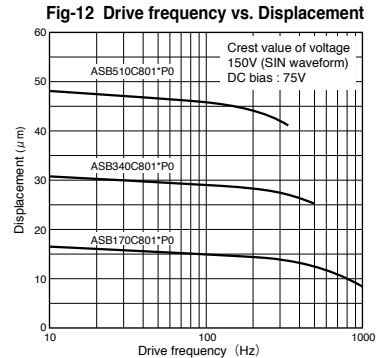
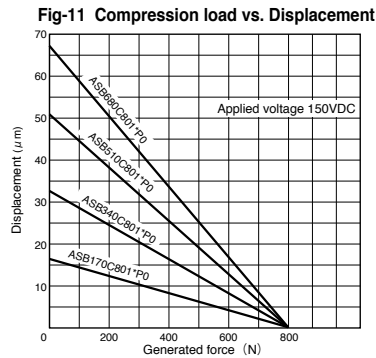
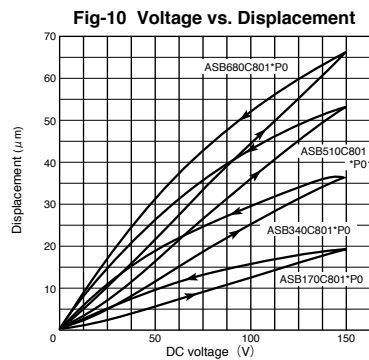


- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

• ASL series performance compare with ASB series

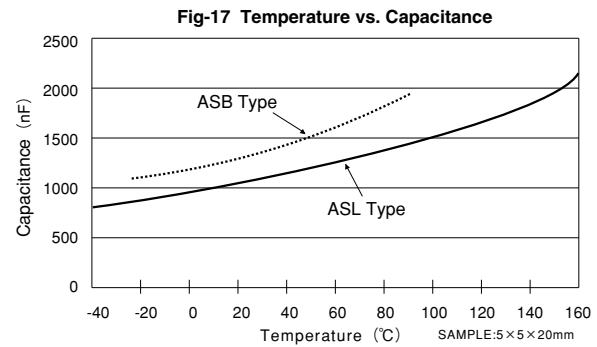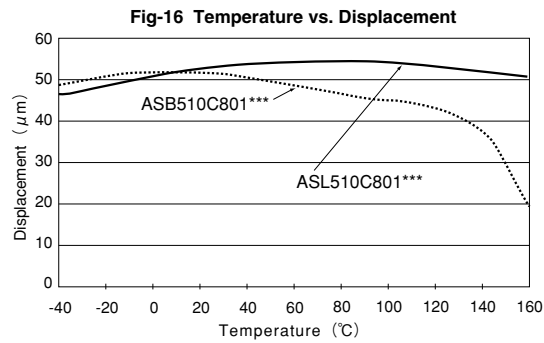

• AHB series

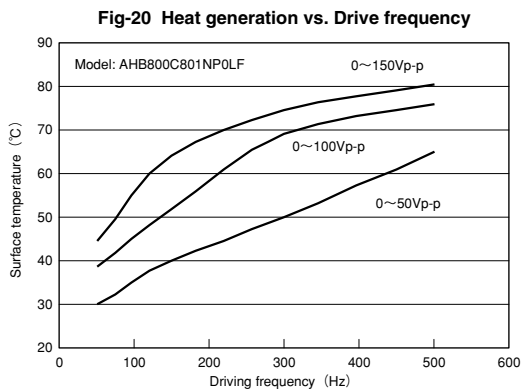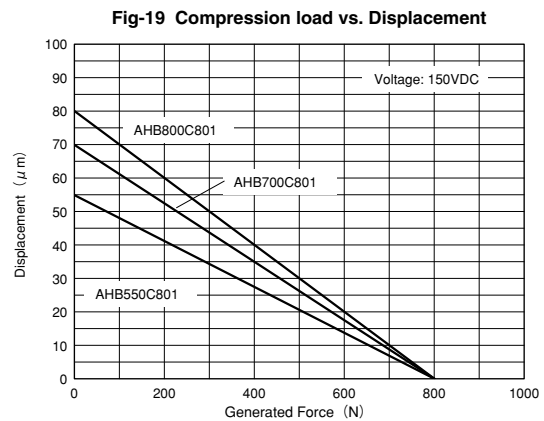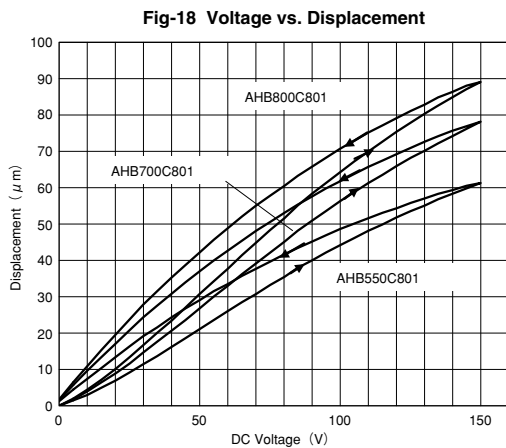

Driving waveform: SIN wave 0~Vp-p
Temperature measurement : 10 minutes after the device is in operation



Application Example

Semiconductor manufacturing system	Positioning of stepper, Clamping actuator of wire bonding, Valve actuation of mass flow controller, Actuator of shaker, Actuator of damping system, Positioning of light source.
Precision machinery, Mechatronics	Sewing machine, Robot, Vibration of parts feeder, Positioning of equipment, Pressure sensor
Home appliance, Audio equipment	Actuator of pump, Speaker
Imaging equipment	Actuator of resolution improvement, Actuator of autofocus, Actuator of damping
Computer, OA equipment	Pressure sensor, Positioning of memory device (data storage or others)
Optical equipment	Positioning of stage, Actuator of autofocus, Actuator of shaker and damping system
Communications	Polarization control, Wavelength control
Medical equipment	Micropump, Ultrasonic transducer, Manipulators
Measuring instrument	Pressure sensor, Acceleration sensor, Fine positioning
Automobile	Vibration control



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Reliability

Majority of failure mode of multilayer piezoelectric actuators is the short circuit due to degraded insulation. Though the cause of degradation of insulation has not been clarified perfectly, it has been found that the failure rate varies greatly between statistic uses (DC voltage application) and dynamic uses (pulse voltage application). Like other electrical components, piezo actuators can be influenced by humidity as well as applied voltage and ambient temperature. NEC TOKIN has added the metal sealed type piezo actuators featuring high reliability by eliminating influence of the ambient atmosphere.

This section describes reliability guidelines for static and dynamic usages of the resin-coated and metal sealed types actuators.

Reliability of our multilayer piezoelectric actuators is represented by MTTF (mean time to failure) in case of static usage. Though the number of repetitions is considered to be used to represent the reliability in the case of dynamic usage, the accurate relationship between the indicator and cause has not been determined because of various influential causes and the mutual action between them. For the present, therefore, only the obtained data and our concept are described.

(1) Resin-coated Type (AE Series)

a. DC voltage application

The acceleration factors have been obtained empirically for each of the drive voltage, ambient temperature and relative humidity based on many experimental result. The MTTF_r in actual applications is estimated using equation (1) below with MTTF_s observed under accelerated condition as the reference value.

$$MTTF_r = MTTF_s \times A_v \times A_h \times A_t \quad \dots (1)$$

MTTF_r : Estimated value

MTTF_s : Reference value (=500h)

$$A_v : \text{Acceleration factor for drive voltage} = \left(\frac{150}{V_r} \right)^{3.2}$$

V_r : Actual voltage (V)

$$A_h : \text{Acceleration factor for relative humidity} = \left(\frac{90}{H_r} \right)^{4.9}$$

H_r : Actual relative humidity (RH%)

$$A_t : \text{Acceleration factor for ambient temperature} = 1.5^{\frac{40-T_r}{10}}$$

T_r : Actual ambient temperature(°C)

[Example] The following calculation is made for the case of use at 25°C, 60% RH and 100 V:

$$\begin{aligned} MTTF_r &= 500 \times \left(\frac{150}{100} \right)^{3.2} \times \left(\frac{90}{60} \right)^{4.9} \times 1.5^{\frac{40-25}{10}} \\ &= 500 \times 3.66 \times 7.29 \times 1.84 \\ &\approx 24,500\text{h (2.8years)} \end{aligned}$$

b. Pulse voltage application

When this element is driven by a pulse voltage, temperature rises as a result of heating due to dielectric loss of ceramics. Therefore, the element is not likely to be influenced by the humidity, thus extending the service life greatly. Since this effect is affected by the element shape, pulse waveform and frequency, it cannot be calculated by an equation as in the case of DC voltage application.

In NEC TOKIN's testing on the AE0203D08, there was no failure confirmed after 0-150 V rectangular pulse wave was applied with 500 Hz for 500 hours (equivalent to 900 million pulses were applied).

Please pay attention to the physical damage due to ringing phenomenon caused by the fixed method of the element and the speed of the voltage rise.

Please refer to the separately printed literature, "NEC TOKIN Multilayer Piezoelectric Actuators User's Manual" for more detail.



(2) Metal Sealed Type (ASB, ASL and AHB Series)

a. DC voltage application

MTTF_r of the metal sealed type under the actual operating conditions is calculated/estimated from the reference MTTF_s and the acceleration factor as in the case of the resin-coated type. However since the internal element is sealed from the atmosphere, it is not influenced by the atmospheric humidity. Therefore, equation (2) below is used.

$$MTTF_r = MTTF_s \times A_v \times A_t \quad \cdot \cdot \cdot (2)$$

MTTF_r : Estimated value

MTTF_s : Reference value (=36,000h)

$$A_v : \text{Acceleration factor for drive voltage} = \left(\frac{100}{V_r} \right)^2 \quad V_r : \text{Actual operating voltage (V)}$$

$$A_t : \text{Acceleration factor for ambient temperature} = 1.5^{\frac{85-T_r}{10}} \quad T_r : \text{Actual operating temperature (}^{\circ}\text{C)}$$

[Example] The following calculation is made for use at 25(c and 150 V:

$$\begin{aligned} MTTF_r &= 36,000 \times \left(\frac{100}{150} \right)^2 \times 1.5^{\frac{85-25}{10}} \\ &= 36,000 \times 0.44 \times 11.3 \\ &\approx 179,000\text{h (20.4years)} \end{aligned}$$

b. Pulse voltage application

Like the resin-coated type, it is extremely difficult to estimate reliability by using an equation in the metal sealed type because of the influence of the pulse waveform, frequency, etc. in addition to the voltage and ambient temperature.

In NEC TOKIN's testing on the ASB170C801NP0, there was no failure confirmed up to 1000 hours (equivalent to 100 million pulses were applied) under the conditions below.

[Conditions for evaluation]

Temperature: 85 ± 2°C

Humidity: 90 to 95% RH

Load: 200 N to 500 N (20 kgf to 50 kgf)

Drive voltage waveform: Rectangular wave, 30 Hz, 0 V to 100 V, duty ratio at 30%



Guide to Use

Fixing Method:

- Carefully prevent the piezo actuators from being bent, being twisted, or being applied tensile force.
Reference: Guide for tolerance of twisting and tension

	Reference value	Remarks
Twisting force	$3 \times 10^{-1} \text{ N} \cdot \text{m}$ or less	For an actuator which generates a force of 800 N (compression resistance)
Tension	50 N or less	

- Install the actuator so that the center axis of generated displacement is aligned with the center axis of the load.


a. Resin-coated type

- Epoxy-based adhesives are recommended for bonding. Select adhesives that have high rigidity and allow minimum thickness so that the generation force and displacement cannot be deteriorated. Also do not form adhesives at the side of actuator.
- When thermosetting resin is used, perform polarizing treatment (see the caution section) again after the adhesive is settled.
- The resin-coated type is weak to tensile force because of its structure and may be broken when tensile force is applied onto the device. Using the device in the state that constantly applies compression is effective against any mechanical damage. The pressure applied to this element should be kept at 20 to 50% of the force generated by this element (compression resistance).
- Install the element so that the axis of generated displacement is vertical to the mounting surface.

b. Metal sealed type

- Select the mounting bracket (female thread type or flange type) according to the mounting method, and install the element utilizing the bracket.
- Fix the element securely so that the generated force and displacement cannot be deteriorated.
- Connect the driven item at the displacement generating end after securing the mounting portion so that it avoids unnecessary stress applied at the time of installation.
- Though this product is designed to apply a compressive force to the internal element by the metal case, avoid any usages that cause bending, twisting, or tension force when the device is in use

Example of Actuator mounting :

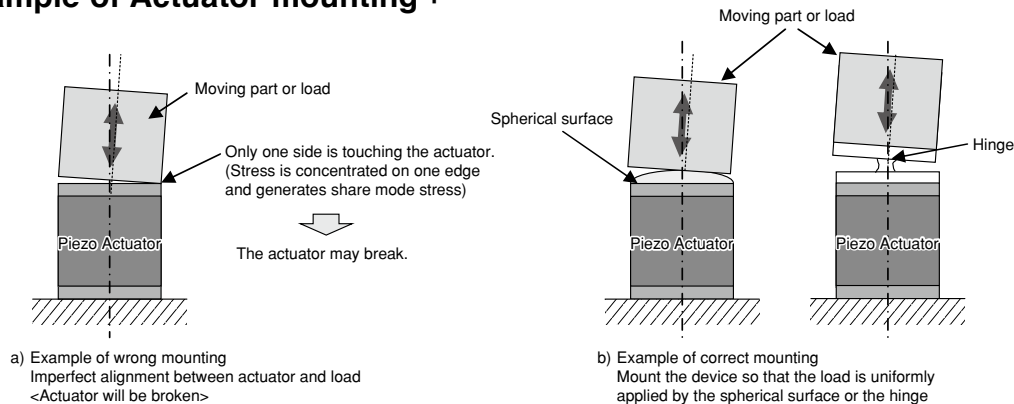


Driving Method:

- Connect the red lead wire to the positive (+) terminal of the power supply. Also prevent reverse voltage application.
- Basically the voltage controls the aimed displacement and generated force. In driving, however, it is also necessary to take ringing due to the resonance or hysteresis of the element itself into consideration. In pulse driving, it is further necessary to pay sufficient attention to heat generation due to dielectric loss, charge/discharge current due to the capacitive component and the power output impedance as well. Please refer to the separately printed literature, "NEC TOKIN Multilayer Piezoelectric Actuators User's Manual"




Generated force and load relation:

Static load: No load value change when actuator moves.

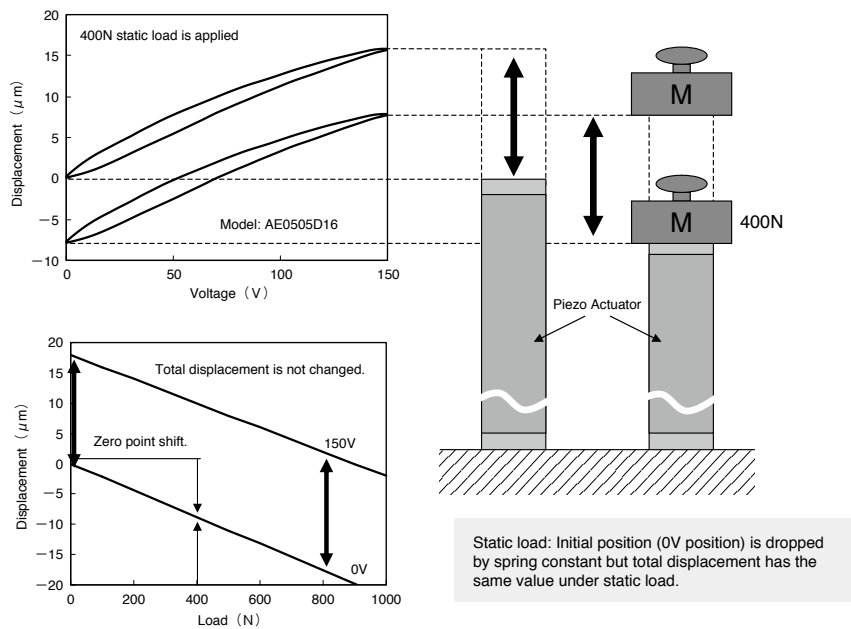


Fluctuating load: Load value changes by spring reaction when actuator moves.

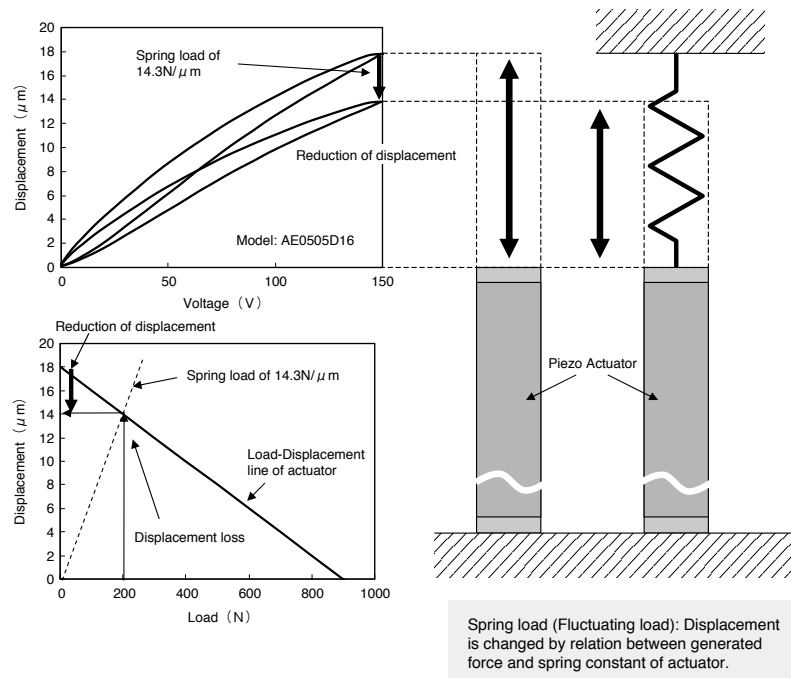

- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

Precautions

- Connect the red lead wire to the positive (+) terminal of the power supply.
- Carefully avoid electric shock since a high voltage is in use.
- Never apply excessive tension to a lead wire. Do not handle the product by picking up or moving the lead wire.
- Do not disassemble the case of the metal sealed type.
- Machining of the actuator element and replacement of the lead wire are prohibited.
- Do not handle the resin-coated type (AE series) with bare hands. Otherwise, the reliability of the element would be degraded.
- Do not wash resin-coated type (AE series) by organic solvent.
- Avoid excessive physical shock resulting from, for example, dropping. Otherwise, the internal piezoelectric ceramic element may be damaged.
- If the actuator is exposed to high temperature above 100°C or if it is used after long storage period (more than three months), it should be polarized by using the circuit configuration and conditions shown below.

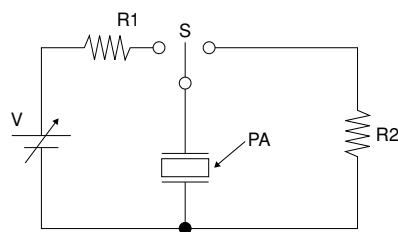

Protective resistor R1=1kΩ
 Protective resistor R2=1kΩ
 Polarizing conditions: DC voltage application
 0V→150±0.2V (to be retained for 10 seconds) →0

- Do not apply voltage exceeding maximum rating voltage, or do not do rapid charging and discharging. These might lead to degradation of the reliability or mechanical fracture.
- Do not use the actuator in high concentration of highly inflammable gas. Otherwise, ignition may occur.
- Use the actuator so as not to cause bending, twisting or tension. Furthermore, align the center axis of displacement of the actuator with the center axis of the mechanical load.
- Drive the actuator so that the rising speed is more than three times as much as the resonance period in order to prevent the device from damaging by ringing.
- Store the resin-coated type (AE series) preferably in a dry atmosphere (desirably below 40% RH) at ordinary temperatures (− 5 to + 40°C). Avoid condensation on the product surface.
- Store actuators where there is no vibration.
- These products must be handled properly as industrial waste. When disposing, please contact your local waste disposal service.
- Piezo actuator is industrial wastes, make sure disposal method under the laws.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.

When using our products, the following precautions should be taken.

- (1) Safety designing of an apparatus or a system allowing for failures of electronic components used in the system

In general, failures will occur in electronic components at a certain probability. NEC TOKIN makes every effort to improve the quality and reliability of electronic component products. However, it is impossible to completely eliminate the probability of failures. Therefore, when using NEC TOKIN's electronic component products, systems should be carefully designed to ensure redundancy in the event of an accident which would result in injury or death, fire, or social damage, to ensure the prevention of the spread of fire, and the prevention of faulty operation. (Please refer to precautions to be taken when using multilayer piezoelectric actuators for the details of failures.)

- (2) Quality level of various kinds of parts, and equipment in which the parts can be utilized
Electronic components have a standard quality level unless otherwise specified.

NEC TOKIN classifies the level of quality of electronic component products into three levels, in order from a lower level, a standard quality level, a special quality level, and a custom quality level in which a customer individually specifies a quality assurance program. Each of the quality levels has recommended applications.

If a user wants to use the electronic parts having a standard quality level in applications other than the applications specified for the standard quality level, they should always consult a member of our company's sales staff before using the electronic parts.

Standard quality level	: Computers, office automation equipment, communications equipment, measuring instruments, AV equipment, household electrical appliances, machine tools, personal equipment, industrial robots
Special quality level	: Transportation equipment (automobiles, railways, shipping, or the like), traffic signals, disaster prevention/crime prevention systems, a variety of safety devices, and medical equipment which is not directly intended for life-support purposes
Custom quality level	: Equipment for airplanes, aerospace equipment, nuclear power control systems, and medical equipment, apparatus or system for life-support purposes

Unless otherwise shown, the quality level of NEC TOKIN's electronic component products included in documents such as catalogues, data sheets or data books is the standard quality level.

- (3) This manual is subject to change without notice.

The contents of this manual are based on data which is correct as of December, 2014, and they may be changed without notice. If our products are used for mass-production design, please consult with a member of our company's sales staff by way of precaution.

- (4) Reprinting and copying of this manual without prior written permission from NEC TOKIN Corporation are not permitted.

- (5) Industrial property problems

In the event any problems associated with industrial property of a third party arising as a result of the use of our products, NEC TOKIN assumes no responsibility for problems other than problems directly associated with the constitution and manufacturing method of the products.

- (6) Should any of these products come under the category of strategic goods or services (according to Japan's foreign trade and foreign exchange regulations), the sender must obtain an export license from the Japanese Government before said products can be exported outside Japan.



- All specifications in this catalog and production status of products are subject to change without notice. Prior to the purchase, please contact NEC TOKIN for updated product data.
- Please request for a specification sheet for detailed product data prior to the purchase.
- Before using the product in this catalog, please read "Precautions" and other safety precautions listed in the printed version catalog.